

Taper Rollers for bends & curves

TR54 Series



TR54 Series are designed for Gravity bends & fitted with free rolling bearings for effortless product transfer (Bearing type KTR.03 & MTR.20)

TR54G Series are designed powered bends on a line shaft / 24v powered system. Rollers are quiet running, fitted with sealed precision bearings &




Found in conveyor bends/curves	Suits Inside Radius	EXTRAS
Boxes	850mm 900mm	Stainless Axles* Anti-Static◇
Totes		
Tyres		

BASE ROLLER	GROOVES YES/NO	ROLLER TYPE	AXLE (AX1 / AX88)	Max. Carton	BEARING TYPE
Ø50 PLASTIC*	NO	TR54-PRG	*Ø8, Ø10 Ø12 & 11HEX	30KGS	KTR.03 PLASTIC
Ø50 BZP STEEL	NO	TR54	Ø8 Ø10 Ø12 & 11HEX	50KGS	MTR.20 STEEL
Ø50 BZP STEEL	YES	TR54G	Ø10 Ø12 & 11HEX	50KGS	STEEL +6202ZZ
Ø50 STAINLES STEEL◇	YES	SSTR54GS	Ø10 Ø12& 11HEX	50KGS	PLASTIC +S6202ZRS

Rollers are compatible with 1700-SX0

ROLLERS REQ'D	21	17	15	11	10	9
INSIDE RAD. 800MM	60 PITCH	75 PITCH	86 PITCH	120 PITCH	133 PITCH	150 PITCH
INSIDE RAD. 850MM	63.5 PITCH	79 PITCH	90 PITCH	127 PITCH	141 PITCH	158 PITCH

AXLE OPTIONS

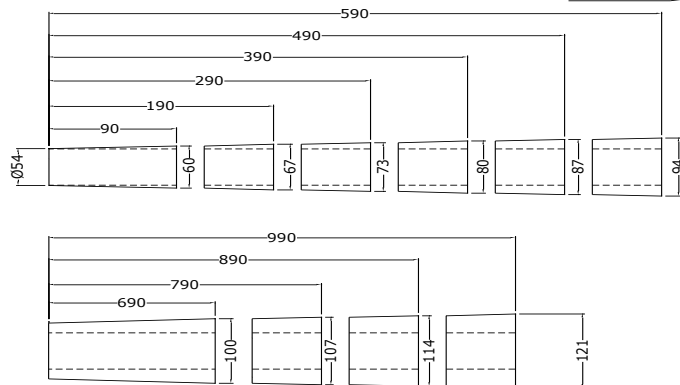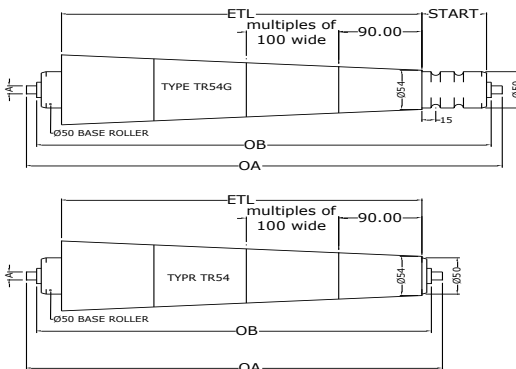

Company Name and address:-

ROLLER TYPE =	
AXLE LENGTH OA =	
OVER BOSS OB =	
AXLE SIZE A=	
AXLE MATERIAL =	Mild steel / stainless
AXLE TYPE	AX1 or AX88
QUANTITY REQUIRED =	
NOTES:	

Please sign & return Order